WD ShareSpace™

Quick Install Guide

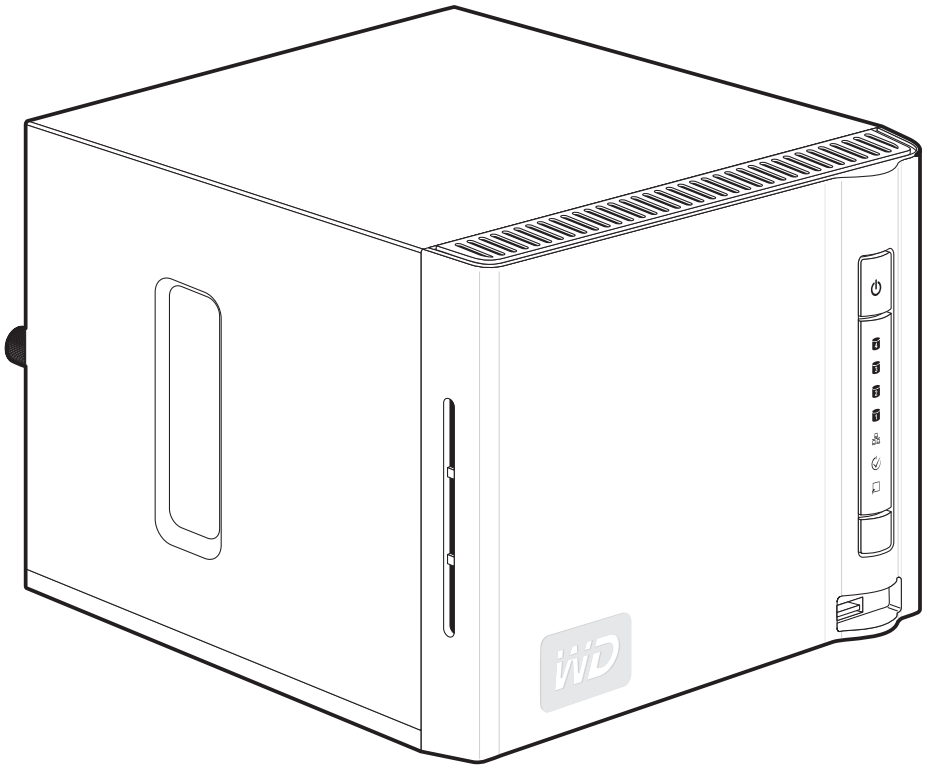

Western Digital®

Quad and Dual-drive Network Storage Systems

Kit Contents









About Your WD Product

Kit Contents

- Network storage system with four or two drives
- Installation CD with software and user manual
- Ethernet cable
- AC adapter
- Mounting rails (two-drive systems only)
- Quick Install Guide

Optional Accessories

For more information on optional accessories for this product, visit *shopwd.com* (U.S. only). Outside the U.S., visit *support.wdc.com.*

System Requirements

- Pentium® III class, 500 MHz or newer
- Windows® 2000/XP/Vista; Mac OS® X 10.4.11+ and 10.5.2+; Linux distributions: Suse (10+), Ubuntu (6+), Fedora (Core 5+)
- Web browser (Internet Explorer 6.0 SP1 and later on Windows platforms supported by this product, Safari 2.0 and later on Mac platforms supported by this product, Firefox 2.0 and later on supported Windows, Mac, and Linux platforms)
- Ethernet connection (network adapter, router, switch, or hub port)
- Broadband internet connection

Note: Compatibility may vary depending on user's hardware configuration and operating system.

Important: For highest performance and reliability, it is recommended that you install the latest updates and service pack (SP). For Windows, go to the **Start** menu and select **Windows Update**. For Mac, go to the **Apple** menu and select **Software Update**.

Registering Your Product

Registering your device enables access to WD services such as news about your product, tips, and updates. Registration is quick and easy. Go to *register.wdc.com* and follow the instructions as prompted.

Format and Configuration

WD ShareSpace is preformatted for maximum capacity as a RAID 5 volume (for four-drive systems) or a single large, spanned volume (for two-drive systems). See the full user manual on the software CD for more information on how to manage RAID on the network storage system.

Front and Rear View

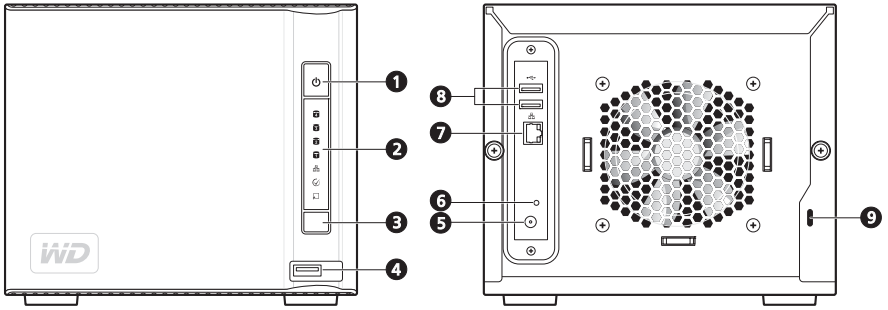

1	Power button	5	Power port
2	LED indicators	6	Reset button
3	Auto-backup button	7	Ethernet port
4	USB port 1 (Auto-backup)	8	USB ports 2 and 3
		9	Kensington security slot

Hardware Setup

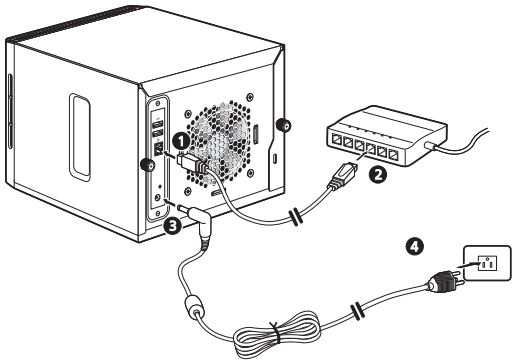

1. Connect one end of the Ethernet cable into the Ethernet port located on the back of the unit.
2. Connect the other end of the Ethernet cable directly into a router or network switch port.
3. Connect the end of the adapter into the DC power supply socket located on the back of the unit.
4. Plug the AC adapter into an electrical outlet.The unit powers up automatically after approximately 30 seconds indicated by a steady green LED illuminated on the power button.

Important: Wait for the network storage system to finish powering up (approximately three minutes) before configuring the device.

Power Button

Important: The device powers on automatically upon initial connection to power, which may take up to three minutes. During this time, do not press the power button.

The power button turns the device on or off. To turn on the device, press the power button and hold down until the LED flashes once, then release. The LED remains off (up to 30 seconds) as the device powers up. Holding the button down for four seconds powers off the device.

Network Storage System Setup

You must set up your network storage system so it can be discovered on the network to which your computer is attached. Follow the steps below to configure your network storage system and map a network drive in Windows 2000/XP/Vista. Skip to page 5 for Mac instructions.

Windows 2000/XP/Vista

1. Turn on your computer and wait for the operating system to load.
2. Insert the software CD into the CD-ROM drive.

   Note: If AutoPlay is disabled on your computer, you must install the utilities manually. Click **Start** and point to **Computer** (Windows Vista) or **My Computer**, then double-click Setup.exe in the root directory of the CD.
3. *Windows Vista*: Click **Run setup.exe**, then click **Allow**.
4. Click **Accept** in the Terms of Agreement screen.
5. If you have connected the device properly as shown in the Connect screen, click **Next**.
6. The Application Installer screen displays a list of options including software, documentation, and a registration link. All applications are selected by default. Deselect any applications you do not want to install, then click **Start**. Or, click **Cancel** to exit and no applications will be installed.
7. The WD Discovery™ screen appears. Click on **WDShareSpace** in the Network Drives Found list and point to and click **Configure**.

8. Enter “admin” in both the **Administrator Name** and **Password** fields and click **Login**. Follow the onscreen prompts to complete setup of the network storage system.

9. Return to the WD Discovery screen and click **Map Network Drive** in the Things To Do list.

10. Enter the user name and password you set during system setup (step 8) in the Login screen. Click **OK**.

11. Click **Yes**.

Map Network Drive
Would you like to map the network drive automatically?
Click "No" to map the network drive manually.
Yes
No

12. All share folders available on the device will be mapped as network drives automatically. Available drive letters are assigned backwards from Z. When mapping completes, the share folders appear as network drives in the WD Discovery screen.

13. Click **Start** and point to **Computer** (Windows Vista) or **My Computer.** The network drives appear. You can now drag and drop files into the network drive folders using My Computer or Windows Explorer.
14. See the complete user manual on the CD for all other basic and advanced device management functions.

Macintosh

1. Turn on your computer and wait for the operating system to load.
2. Open the Safari web browser.
3. Click the Bookmarks link in the upper left corner of the screen.
4. Click **Bonjour**, then click **WDShareSpace**.

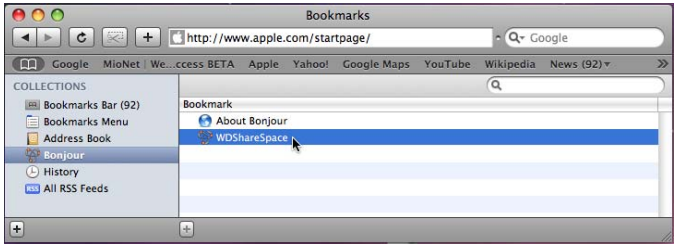

5. Enter “admin” in both the **Administrator Name** and **Password** fields and click **Login**. Follow the onscreen prompts to complete the configuration of the network storage system.

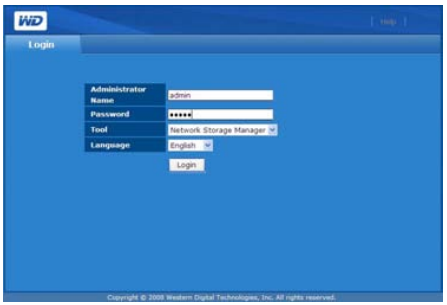

6. In Finder, click **Go** and point to **Connect to Server**.
7. Enter “smb://wdsharespace” and click **Connect**.

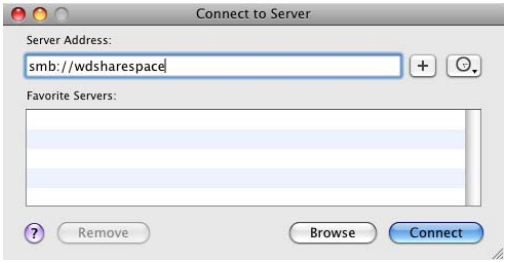

8. Click **Registered User** and enter the user name and password you set during system setup (step 5). Then, click **Connect**.

9. Click the share you want to access, then click **OK**. The share appears as a shared drive icon on the desktop. For instructions on creating an alias to make the shared drive icon permanent on the desktop, go to *support.wdc.com* and search the knowledge base for answer ID 2541.

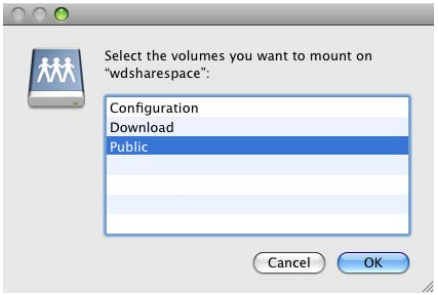

Note: Configuration is a read-only share containing only a Help file and the login page.

10. See the complete user manual on the software CD for all other basic and advanced device management functions.

Regulatory Compliance

FCC Class B Information

This device has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This unit generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception. However, there is no guarantee that interference will not occur in a particular installation. Any changes or modifications not expressly approved by WD could void the user's authority to operate this equipment.

The following booklet, prepared by the Federal Communications Commission, may be helpful: *How to Identify and Resolve Radio/TV Interference Problems*. This booklet is Stock No. 004-000-00345-4 available from the US Government Printing Office, Washington, DC 20402.

The provided Ethernet cable must be used between the unit and network connection to comply with FCC Part 15 Class B and EN-55022 Class B.

CSA Notice

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This Class B digital apparatus complies with Canadian ICES-003.

Underwriters Laboratories Inc.

Approved for US and Canada. CAN/CSA-C22.2 No. 60950-1, UL 60950-1. Information Technology Equipment - Safety - Part 1: General Requirements (File E101559).

This product is intended to be supplied by a listed limited power source, double insulated, or direct plug-in power unit marked "NEC" or "Class 2."

CE Compliance For Europe

Verified to comply with EN55022 for RF Emissions and EN50082-1 for Generic Immunity, as applicable.

Environmental Compliance (China)

有毒有害物质或元素名称及含量标识
Toxic / Hazardous Substances and Elements Table

部件名称	有毒有害物质或元素					
	铅（Pb）	汞（Hg）	镉（Cd）	六价铬（Cr (VI)）	多溴联苯（PBB）	多溴二苯醚（PBDE）
机架 chassis	×	O	O	O	O	O
外部盖板 external covers	×	O	O	O	O	O
机械组合件 mechanical assemblies	O	O	O	O	O	O
冷却组合件 cooling assembly	O	O	O	O	O	O
空气传动设备 air moving devices	O	O	O	O	O	O
电源 power supply	O	O	O	O	O	O
处理器模块 processor modules	×	O	O	O	O	O
内存模块 memory modules	×	O	O	O	O	O
电池 batteries	O	O	O	O	O	O
电缆组合件 cable assemblies	O	O	O	O	O	O
存储设备 storage device	×	O	O	O	O	O
有 mech 的电路卡 circuit cards with mechs	×	O	O	O	O	O
无 mech 的电路卡 circuit cards w/o mechs	×	O	O	O	O	O

O：表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T 11363—2006规定的限量要求以下。

×：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363—2006规定的限量要求。

环保使用期限（EPUP）的免责条款：EPUP 规定的具体期限仅为符合中华人民共和国的相应的法律规定，并非代表 IBM 向客户提供保证或负有任何义务。EPUP 中假定客户按照操作手册在正常情况下使用本产品。对于本产品中配备的某些组合件（例如，装有电池的组合件）的 EPUP，其效力可能低于本产品的 EPUP。

GNU General Public License ("GPL")

Firmware incorporated into WD ShareSpace includes third party copyrighted software licensed under the GPL ("GPL Software"). In accordance with the GPL: 1) the source code for the GPL Software may be obtained at *support.wdc.com/download/gpl*; 2) you may re-use, re-distribute and modify the GPL Software; 3) with respect solely to the GPL Software, it is provided "as is" without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, to the extent permitted by applicable law; and 4) a copy of the GPL is included on the enclosed CD, may be obtained at *www.gnu.org,* and may also be found at *support.wdc.com/download/gpl*.

Warranty Information

Obtaining Service

WD values your business and always attempts to provide you the very best of service. If this Product requires maintenance, either contact the dealer from whom you originally purchased the Product or visit our product support Web site at *support.wdc.com* for information on how to obtain service or a Return Material Authorization (RMA). If it is determined that the Product may be defective, you will be given an RMA number and instructions for Product return. An unauthorized return (i.e., one for which an RMA number has not been issued) will be returned to you at your expense. Authorized returns must be shipped in an approved shipping container, prepaid and insured, to the address provided on your return paperwork. Your original box and packaging materials should be kept for storing or shipping your WD product. To conclusively establish the period of warranty, check the warranty expiration (serial number required) via *support.wdc.com*. WD shall have no liability for lost data regardless of the cause, recovery of lost data, or data contained in any Product placed in its possession.

Limited Warranty

WD warrants that the Product, in the course of its normal use, will be free from defects in material and workmanship for a period of three (3) years, unless otherwise required by law, and will conform to WD's specification therefor. This limited warranty period shall commence on the purchase date appearing on your purchase receipt. WD shall have no liability for any Product returned if WD determines that the Product was stolen from WD or that the asserted defect a) is not present, b) cannot reasonably be rectified because of damage occurring before WD receives the Product, or c) is attributable to misuse, improper installation, alteration (including removing or obliterating labels and opening or removing external enclosures, unless the product is on the list of limited user-serviceable products and the specific alteration is within the scope of the applicable instructions, as found at *support.wdc.com*), accident or mishandling while in the possession of someone other than WD. Subject to the limitations specified above, your sole and exclusive warranty shall be, during the period of warranty specified above and at WD's option, the repair or replacement of the Product. The foregoing warranty of WD shall extend to repaired or replaced Products for the balance of the applicable period of the original warranty or ninety (90) days from the date of shipment of a repaired or replaced Product, whichever is longer.

The foregoing limited warranty is WD's sole warranty and is applicable only to products sold as new. The remedies provided herein are in lieu of a) any and all other remedies and warranties, whether expressed, implied or statutory, including but not limited to, any implied warranty of merchantability or fitness for a particular purpose, and b) any and all obligations and liabilities of WD for damages including, but not limited to accidental, consequential, or special damages, or any financial loss, lost profits or expenses, or lost data arising out of or in connection with the purchase, use, or performance of the Product, even if WD has been advised of the possibility of such damages. In the United States, some states do not allow exclusion or limitations of incidental or consequential damages, so the limitations above may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Technical Support Services

If you need additional information or help during installation or normal use of this product, visit our product support Web site at *support.wdc.com* and search our knowledge base.

support.wdc.com
www.westerndigital.com

800.ASK.4WDC North America
949.672.7199 Spanish
+800.6008.6008 Asia Pacific
+31.20.4467651 Europe/Middle East/Africa

Western Digital
20511 Lake Forest Drive
Lake Forest, California 92630
U.S.A.

Western Digital, WD, and the WD logo are registered trademarks; and WD ShareSpace and WD Discovery are trademarks of Western Digital Technologies, Inc.
Other marks may be mentioned herein that belong to other companies. Specifications subject to change without notice.
© 2008 Western Digital Technologies, Inc. All rights reserved.

4079-705010-A00 Jun 2008